

CS06 UNDERWATER CHAIN SAW

STANLEY



The **CS06** is a hydraulic powered chain saw for cutting all types of wood structures underwater - including bridge pilings, pier and dock timbers. It's compact design and high torque gear motor provides divers instant chain speed to cut through the toughest timbers with ease. The power to weight ratio is significantly higher than any other wood cutting chain saw and is available with bar lengths up to 20" (51 cm). Painted hi-visibility yellow.



FEATURES

- Integral Stanley Hyrevz gear motor produces high torque
- Direct drive motor - no chain coast when trigger is released
- Stainless Steel spool and fasteners
- Interlocking safety trigger and hand guard
- Low kick back bar and chain - standard
- Open Center/Closed Center-Dual Spool Feature
- Large assist handle
- Adjustable chain oiler
- Bucking cleat
- Wide flow range

SPECIFICATIONS

Cut Capacity	15 & 20" / 38 & 51 cm (See Ordering Information)
Chain Drive	Standard Floating Rim Sprocket & Wear Plates
Chain Type	0.325" Pitch
Flow Range	7-9 gpm / 26-34 lpm
Optimum Flow	8 gpm / 30 lpm
Working Pressure	1500-2000 psi / 105-140 bar
Full Relief Setting	2250 psi / 155 bar
Motor Speed @ 8 gpm	8540 rpm
Chain Speed @ 8 gpm	3238' per min / 16,45 meters per sec
Weight (less bar/chain)	7.3 lbs / 3.3 kg
Length (less bar/chain)	14" / 36 cm
Width	9" / 23 cm
Hydraulic Ports	-8 SAE O-ring
Connection Size and Type	3/8" Male Pipe Adapter
Couplers	No (See accessories)
Hose Whips	No (See accessories)



CS06 UNDERWATER CHAIN SAW

STANLEY

ORDERING INFORMATION

PART NUMBER

- CS06920** Chain Saw, Underwater, 15" Cut Capacity, with Bar & Chain
- CS06930** Chain Saw, Underwater, 20" Cut Capacity, with Bar & Chain


ACCESSORIES

- 03971** Flush-Face Coupling Set, 3/8" NPT
- 03974** Flush-Face Coupling Set, 1/2" NPT
- 06830** Hose Whip 18" long, -8 SAE x 1/2" NPT
- 07638** 15" Saw Bar
- 07641** 15" Saw Chain
- 07639** 20" Saw Bar
- 07642** 20" Saw Chain
- 11464** Srench
(combination screwdriver-bar nut wrench)
- 31848** Dual Hose, 50' x 1/2", with couplers
- 31972** Dual Hose, 25' x 1/2", with couplers
- 58633** Twinned Hose, 25' x 1/2", with couplers
- 58634** Twinned Hose, 50' x 1/2", with couplers

When hydraulic hose exceeds 100' (30.4 m) in length, increase I.D. of both pressure and return hose. For more information, consult Stanley Hydraulic Tools.

IMPORTANT

To fill out a Product Warranty Recording form and for information on your warranty visit stanleyhydraulic.com and select the Warranty tab.

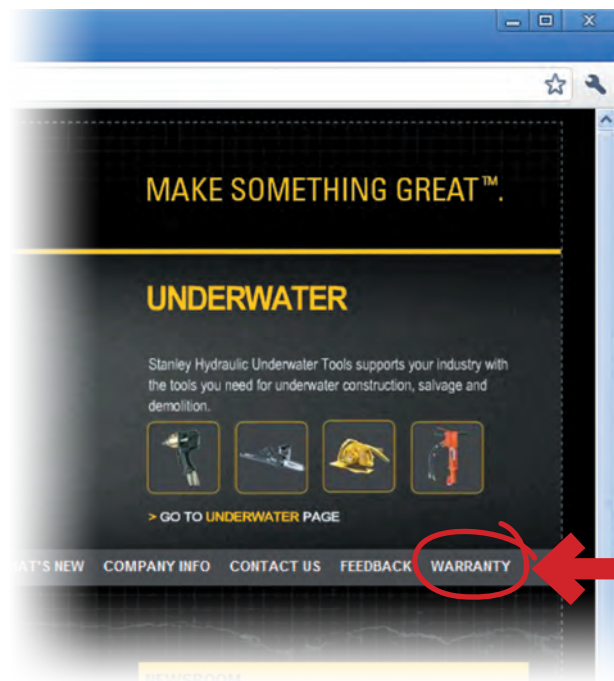

Note: The warranty recording form must be submitted to validate the warranty.

All Stanley Hydraulic Tools, parts, accessories and allied equipment are subject to design improvements, specifications and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your applications, please consult Stanley Hydraulic Tools.