

BR45 UNDERWATER BREAKER/DRIVER

STANLEY



SPECIFICATIONS

Performance	1525 bpm @ 8 gpm
Steel Capacity	1" x 4 1/4" Hex
Handle Type	T-Handle
Circuit Type	Open Center
Flow Range	7-9 gpm / 26-34 lpm
Optimum Flow	8 gpm / 30 lpm
Working Pressure	1500-2000 psi / 105-140 bar
Full Relief Setting	2250 psi / 155 bar
Weight (less tool bit)	43 lbs / 19.5 kg
Length	25" / 63.4 cm
Width (at handles)	14" / 35 cm
Hydraulic Ports	-8 SAE O-ring
Couplers	No (See Accessories)
Hose Whips	Yes (3/8" NPT Male thread)

The **BR45** is a rugged, powerful and lightweight breaker in the 40-55 lb class used for light to medium concrete, rock and coral breaking and removal.



The **BR45** is the smallest breaker in the Stanley Hydraulic Tool lineup of underwater breakers. The feathering on/off valve controls speed and allows easier initial tool placement. Standard 1" hex chuck and latch retainer. Painted hi-visibility yellow.

FEATURES

- T-Handle with large on/off trigger for precise control
- Stainless Steel spool and fasteners
- Trouble free diaphragm accumulator provides additional blow energy and reduces recoil
- Feathering on/off valve allows easy initial tool bit placement
- Uses standard 1" x 4 1/4" hex shank tool bits
- Four tie rod design for durability
- Operates in any position
- Modular design for ease of service
- Latch retainer

BR45 UNDERWATER BREAKER/DRIVER

STANLEY

ORDERING INFORMATION

PART NUMBER

BR45350 Paving Breaker, Underwater, 1" Hex, less couplers


ACCESSORIES

- 03971** Flush-Face Coupling Set, 3/8" NPT
- 03974** Flush-Face Coupling Set, 1/2" NPT
- 31848** Dual Hose, 50' x 1/2", with couplers
- 31972** Dual Hose, 25' x 1/2", with couplers
- 58633** Twinned Hose, 25' x 1/2", with couplers
- 58634** Twinned Hose, 50' x 1/2", with couplers
- 07702** Moil Point, 1" Hex, 14" under collar
- 07703** Narrow Chisel, 1" Hex, 14" under collar
- 07704** 3" Wide Chisel, 1" Hex, 14" under collar
- 07705** Clay Spade, 1" Hex, 5 1/2" Wide Blade
- 07706** Asphalt Wedge, 1" Hex, 3" Wide Blade

When hydraulic hose exceeds 100' (30.4 m) in length, increase I.D. of both pressure and return hose. For more information, consult Stanley Hydraulic Tools.

IMPORTANT

To fill out a Product Warranty Recording form and for information on your warranty visit stanleyhydraulic.com and select the Warranty tab.

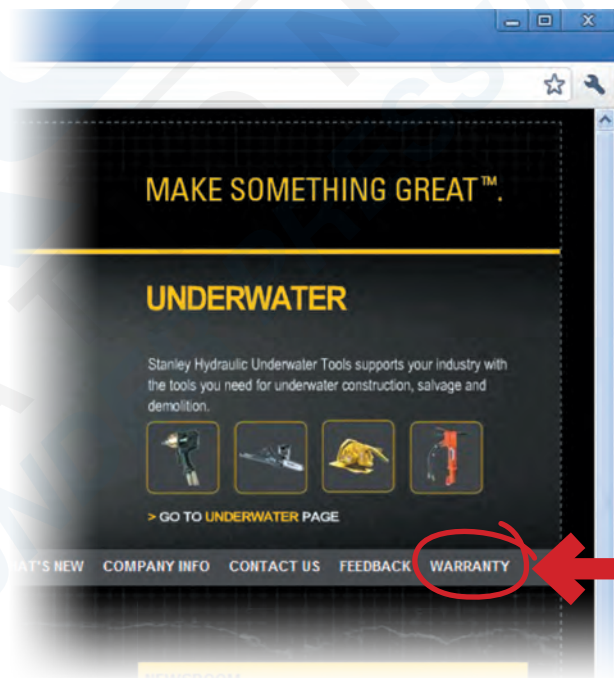

Note: The warranty recording form must be submitted to validate the warranty.

All Stanley Hydraulic Tools, parts, accessories and allied equipment are subject to design improvements, specifications and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your applications, please consult Stanley Hydraulic Tools.